

## Delta Part 3000 - Smart Superthermic Insulated Bi-Folding Door

**Product Data Sheet**  
**7 / 3**

### Product Description

The new generation of industrial doors are expressed by the Superthermic range of products. We have put into practice the experience built up over fifty years of design and manufacture, during which it has kept pace with the evolution of technology.

The production of large volumes of doors has always been marked by a high competence for customised solutions and the innovative design, especially appreciated by the architects as well as the end users.

Our business vision is based on employing cutting-edge technology for our products, certified by many exclusive patents, to provide solutions with added value for our customers.

Sustained by these solid roots, Enerco is the ideal partner for every architect, design engineer, building contractor or end user who is looking for door solutions that combine quality, functionality with high levels of aesthetics.

The Delta Part 3000 is one of our range of highly insulated bi-folding doors manufactured for openings up to 5500mm wide openings. The maximum height of the door is 5050mm



The Smart door offers a proven individual door system solution where insulation, minimum headroom of only 150mm, no bottom track, high security and large openings are being considered.

All Enerco insulated bi-folding doors are manufactured in modular design and are almost maintenance free. This results in outstanding operational reliability, fast and inexpensive repairs when damage occurs, as well as low operating costs.

This is especially true of this door with its various patents and exclusive design. Providing high levels of insulation from its 52mm thick panels the Smart door is our most competitively priced model to replace the conventional un-insulated steel folding shutter commonly used throughout the UK market.

### Product Advantages

1. High insulation, 52mm thick CFC Polyurethane filled panels with thermal insulation value (for 25 m<sup>2</sup> surface without windows) of 1,53 W/m<sup>2</sup>.°K
2. Can be manufactured to suit large openings up to 5050mm high x 5500mm wide.
3. Aesthetically designed to complement the building structure
4. Opens to one side or bi-parting in leaf formats of 2 + 2, 2 + 1, 2 + 0 or 1 + 1
5. Leaves stored neatly at 90° to the aperture when open.
6. Is only supplied for manual operation.
7. Emergency wicket doors or integrated personnel doors available.
8. Quick operational speeds offering full height opening immediately thus virtually eliminating the often, high cost repairs associated with vertically rising doors.
9. Will operate normally in wind pressures of up to 140km/h BS EN 12424 Class 4
10. Full range of vision sections







## Applications

- Large opening where conventional sectional doors and roller shutter are limited.
- Minimise draughts, improve insulation and maintain constant temperatures.
- As an external door where goods are despatched and received on a regular basis.
- As a partition between factory areas.
- Improves the working environment.
- Enhances aesthetic appearance.
- Exposed applications.
- Loading bay areas.

## Door Design

The panels are manufactured from two skins of galvanised powder coated steel sheets encapsulating the robust internal steel frame sections that provide the door with its superior strength characteristics. Once assembled, the panels are injected with the CFC Polyurethane foam and assembled with the hinges, seals any additional items such as windows or mouldings.

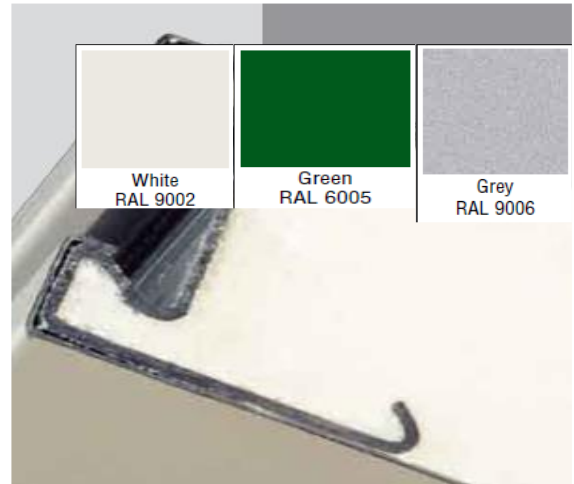

The hinges are produced from galvanised steel, painted black, fitted with ball bearings and assembled to the load bearing frame by means of an adaptor plate and are concealed with the black rubber seal. (Patented system)

The extruded galvanised top track profile provides the hinge point and support for the panels to store them at 90° to the opening.

Fully adjustable roller trolleys are fitted with adjustable 20 mm dia. pins to ensure the door can cater for any uneven door levels.

## Operation

The door is manually operated.

The door is simply unlocked and pushed / pulled open and closed. To lock simply operate the locking bar .

The top track supports the weight of the door and enables the door to withstand the high wind pressures



## Windows

Can be inserted in every leaf of the door and the dimensions can be customised according to the size of the door leaves and the customer's requirements. The windows can be set in either black rubber EPDM frame with 130mm radius corners which makes it possible to insert safety glass up to 10 mm thick. Alternatively aluminium profiles with thermal breaks and 90° mitred corners can be used which allows for safety or double glazed glass up to 40 mm thick. Available in any geometric shape with standard size glazing as per the details below.

On request, special glass with "low U-values" can be fitted to ensure compliance with relevant building control requirements.

## Dimensions

As standard the following window sizes are available in both the rubber and aluminium frames with transparent 8/9 safety glass,

530mm diameter, 700mm x 700mm, 500mm x 600mm,  
700mm x 1000mm, 500mm x 800mm, 700mm x  
1500mm, 580mm x 880mm & 700 x 2000 mm.



## Standard Colours

On request, powder coated finishes are available in other RAL colours.

The unique manufacturing process allows us to customise the aesthetics of the door with plain door leaves, vertical mouldings, rounded panes etc, please ask any of our team for advice.

### Wicket Door

Wicket doors can be incorporated into the door leaf of the door with or without a threshold. The door can be equipped with a panic bar or handle, cylinder and key.

### Locking

The locking comprises of a black shoot bolt handle with galvanised steel bars which when activated protrude into the locks in the top and bottom position.



### Warranty

The door is supplied with a 12 month parts and labour warranty as standard providing the equipment is serviced by an Enerco trained fully qualified high speed door engineer in accordance with the service intervals detailed below. To satisfy the requirements of the warranty, an agreement must be signed and dated within 30 days of the installation date. Failure to service the product in accordance with the service schedule or by unqualified engineers will result in the warranty being null and void.



### Servicing

To help protect your investment and extend the effective working life of the equipment, full maintenance packages are available and, in most cases, we can maintain all of your existing doors and loading bay equipment. The door must be serviced at least once per annum or every 25,000 cycles whichever is applicable. Full details of our preventative maintenance packages are available on request. Enerco recommend the first service is carried out 6 months after installation to ensure the number of cycles can be monitored.

Other products in the Delta range from Enerco include: -

- Delta Guard – Commercial Shutters
- Delta Roll – Steel Roller Shutter Doors
- Delta Check – Fire Roller Shutter
- Delta Secure – High Speed Security Doors
- Delta Slide – Insulated Overhead Doors
- Delta Insudoor – Insulated Roller Shutters
- Delta Strip – Strip Curtains
- Delta Steel – Steel Security Door Sets
- Delta Fold – Steel Sliding Folding Shutters
- Delta Level – Dock Levellers
- Delta Lift – Scissor Lifts
- Delta Seal – Dock Sealing Systems
- Delta Shield – Perimeter Security
- Delta Bar – Window Bars
- Delta Grille – Retractable Window Grilles
- Delta Service – Service and Repairs
- Delta Load – Loading Bay Accessories
- Delta Glide – Garage Doors
- Delta Aluglaze – Aluminium Glazed Systems
- Delta Crash – Crash Door Systems

Please contact our sales team for more information on 01525 289322 or a brochure. Alternatively visit our web site [www.enerco.co.uk](http://www.enerco.co.uk) or [www.enercohighspeeddoors.co.uk](http://www.enercohighspeeddoors.co.uk)



**Technical Data**

Application	Internal External	Yes Yes
CE Marked	Manufacturers Declaration of Conformity	Compliant
Mechanical compliance	BS EN12604	Compliant
Safe Use of Power Operated Doors	BS EN12453	N/A
Safety equipment	DIN EN13241 – 1	N/A
Resistance against wind pressure	DIN EN12424	Class 4
Sound Insulation		22dB
Door sizes	Width max. mm (2 + 2 leaves, 5500mm)	5500
	Height max. mm	5050
Space requirement for fitting	Subject to size	
	Headroom internally mounted	150
	Headroom externally mounted	730
Control Panel Style & Size	Controls in plastic casing (W x H x D) cm	N/A
Door construction	Self supporting	Modular
Curtain / Door leaf	52mm thick insulated panels	Included
Track Material	Galvanised steel	Included
	Powder coated RAL choose colour	Optional
	Polished stainless steel	N/A
Track Cover	Standard	Optional
	Sloped 30°	Optional
Operator and controls	Manual operation	Included
	Electric operation	N/A
	Open-Stop-Close Buttons	N/A
	Emergency Stop	N/A
	Fuse rating if electrically operated	N/A
	Protection category	N/A
	Safety protection                      Photocell	N/A
	Safety edge	N/A
	Timed closing	N/A
	Electronic limits	N/A
Emergency Opening	Manual change over if electrically operated	N/A
Activators	Induction loop	N/A
	Photocells	N/A
	Pull cords	N/A
	Radar	N/A
	Radio control	N/A
Accessories	Traffic lights	N/A
	Flashing beacon	N/A
	Audible alarm	N/A
	Protection barriers / Bollards	Optional

We have Safe Contractor, CHAS and Construction Line accreditation as well as being active members of the Doors and Hardware Federation (DHF) where we have their seal of approval for the service and maintenance of doors. We ensure that our staff are trained to the highest standard and all have an NVQ qualification in line with current industry guidelines This NVQ is in addition to the CSCS Health and Safety, First Aid, Asbestos Awareness and other training including product training applicable to our industry and is continually being updated.



We reserve the right to change the product data sheets and specification without prior notification